

Osnovna ploča GPL

PREGLED



GPL, GPS



GPR

Svojstva:

Materijal	Čelik DD11 (materijal br. 1.0332) prema DIN EN 10111
Pocinkovanje	Galvanski pocinkovano, 8 µm

OPIS PROIZVODA


- Osnovna ploča u lakoj, teškoj i okrugloj izvedbi sa navarenim navojnim nastavkom.

Prednosti/koristi


- Oblik otvora u ploči omogućava jednostavno i precizno pozicioniranje.

MONTAŽA

- Kod montaže sa odstojanjem od zida mora se paziti na dozvoljeno savijanje i maksimalno opterećenje osnovne ploče.



TEHNIČKI PODACI

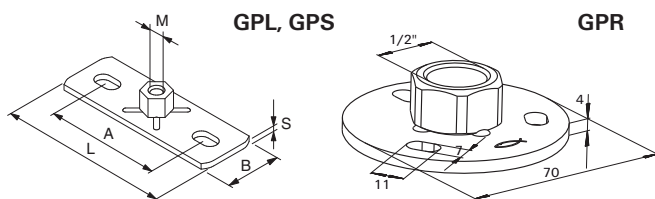

Tip	Bř. art.	Pakovanje	Navoj	Dužina	Širina	Rastojanje rupa	Uzdužna rupa	Debljina
		[Kamada]	M	L	B	A	[mm]	S
				[mm]	[mm]	[mm]	[mm]	[mm]
GPL								
GPL M 8	079665	25	M 8	80	30	54	9 x 16	3
GPL M 10	079666	25	M 10	80	30	54	9 x 16	3
GPL 1/2"	079667	25	1/2"	80	30	54	9 x 16	3
GPS								
GPS M 10	079671	25	M 10	120	40	79	11 x 19	4
GPS M 12	040398	25	M 12	120	40	79	11 x 19	4
GPS M 16	504408	25	M 16	120	40	79	11 x 19	4
GPS 1/2"	079672	25	1/2"	120	40	79	11 x 19	4
GPS 3/4"	020968	25	3/4"	120	40	79	11 x 19	4
GPR								
GPR 1/2"	037289	25	1/2"	-	-	-	11 x 7	4

TERETI

Tip	Maks. prihv. teret (centr. vučenje)
	N_{mpf} [kN]
GPL M 8	2,4
GPL M 10	2,4
GPL 1/2"	2,4
GPS M 10	4,0
GPS M 12	4,0
GPS M 16	4,0
GPS 1/2"	4,0
GPS 3/4"	4,0
GPR 1/2"	4,0