



www.esbe.se



SERIES CRA120




NO.1 IN HYDRONIC SYSTEM CONTROL



Series CRA120

CE
LVD 2006/95/EC
EMC 2004/108/EC
RoHS 2002/95/EEC






Mtrl.nr. 9814 03 92 • Ritn.nr. 9212 utg. B • Rev. 1012




1

2


3




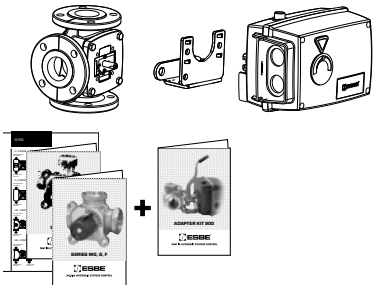



1

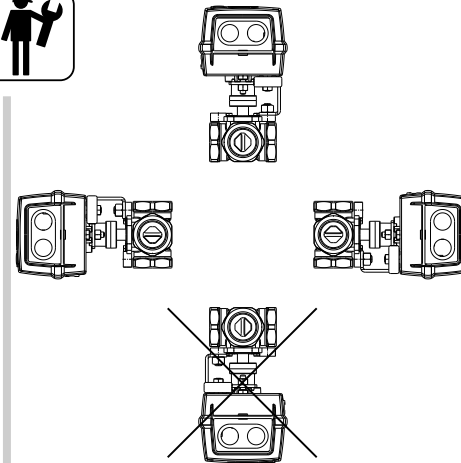

2


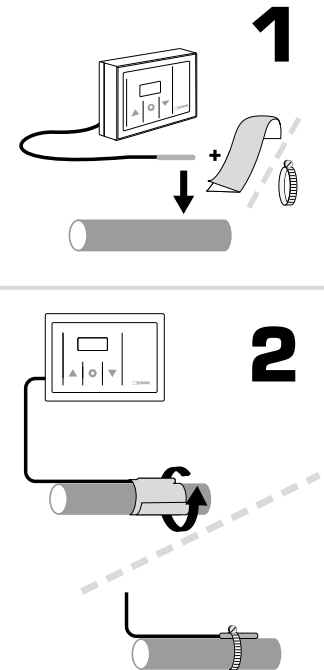


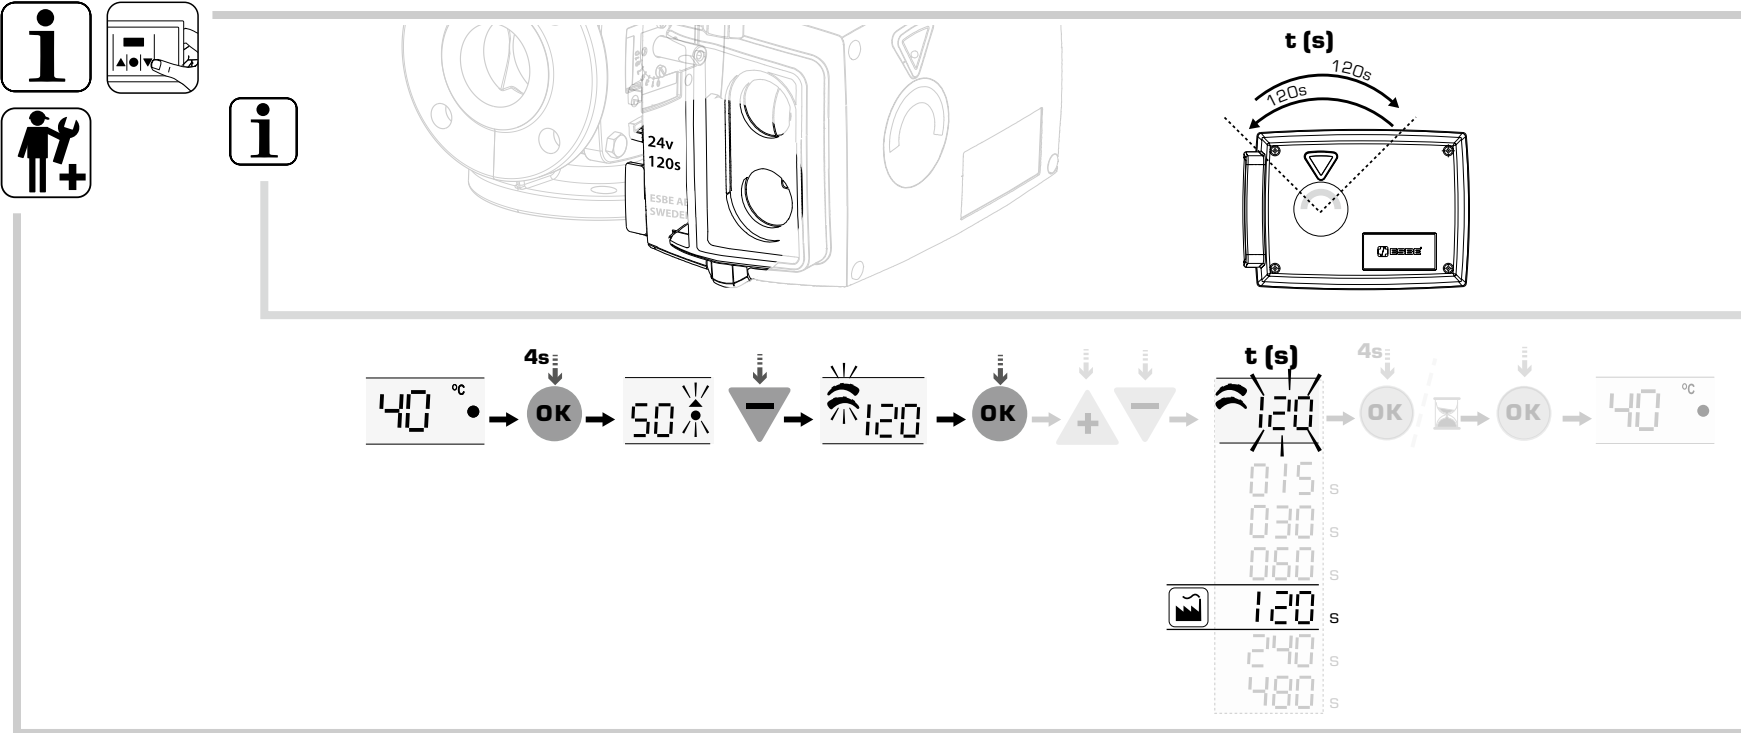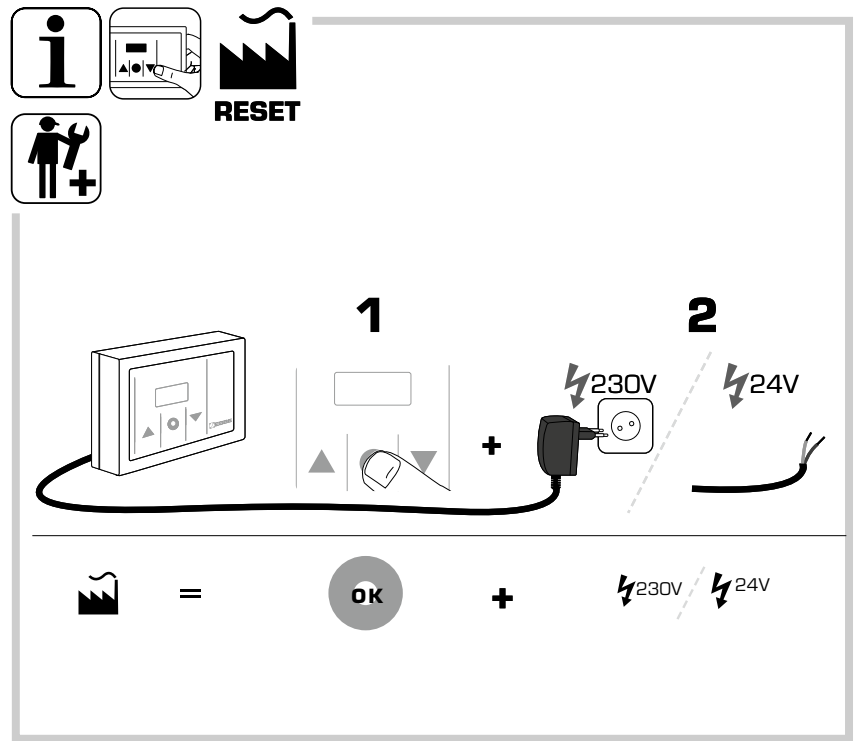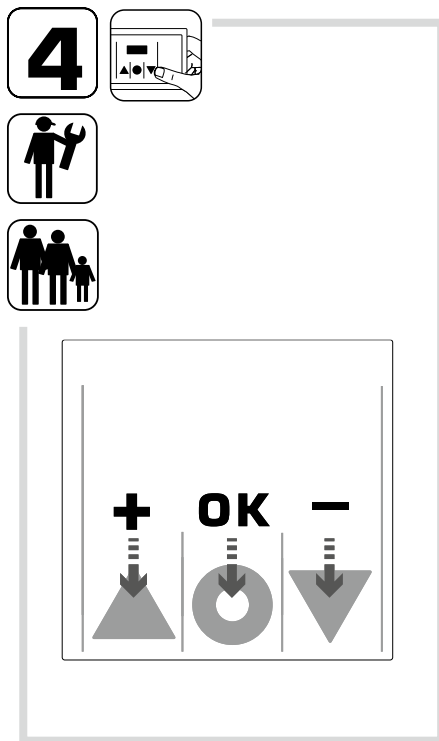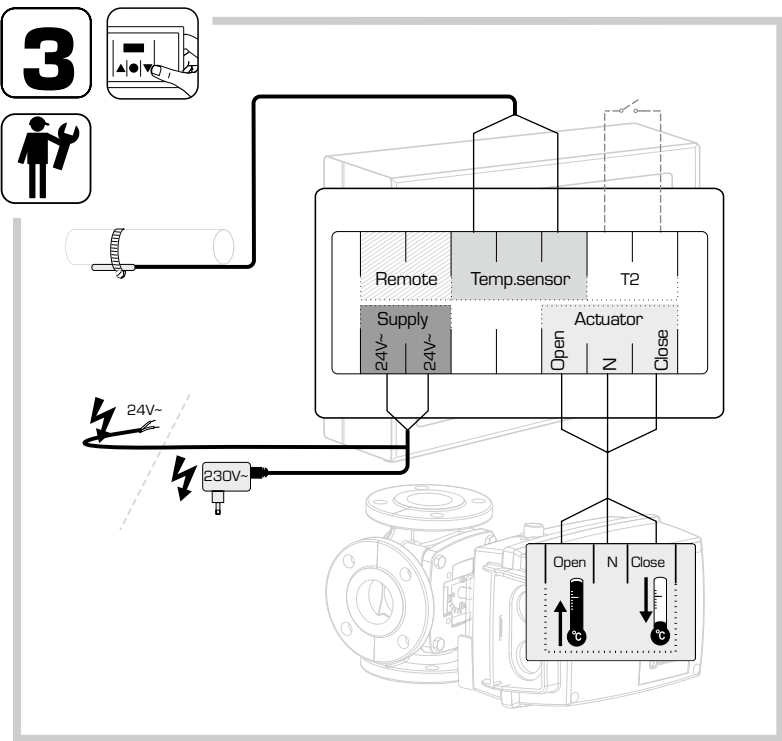





i

▲ = MAX °C





| | |
|--|-------------|
| | 50 °C |
| | ~40 - 50 °C |
| | ~60 - 80 °C |
| | 60 °C |


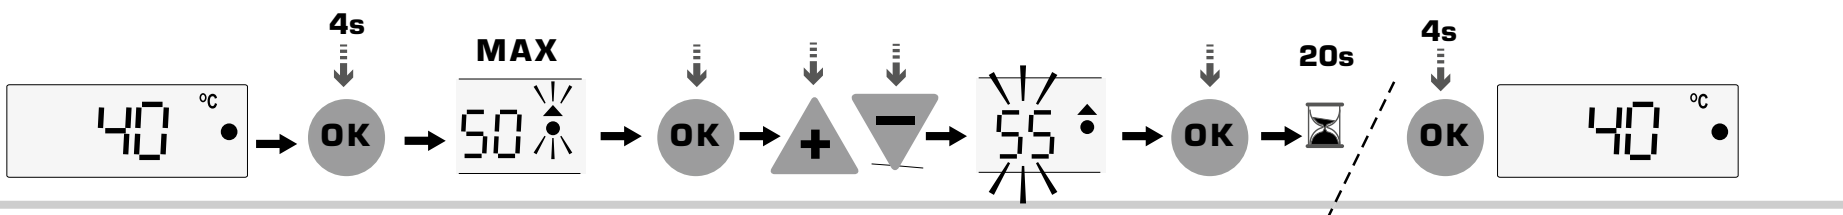


i




▼ = MIN °C






| | |
|--|------------|
| | 5 °C |
| | ~5 - 25 °C |
| | ~5 - 25 °C |
| | ~5 - 25 °C |

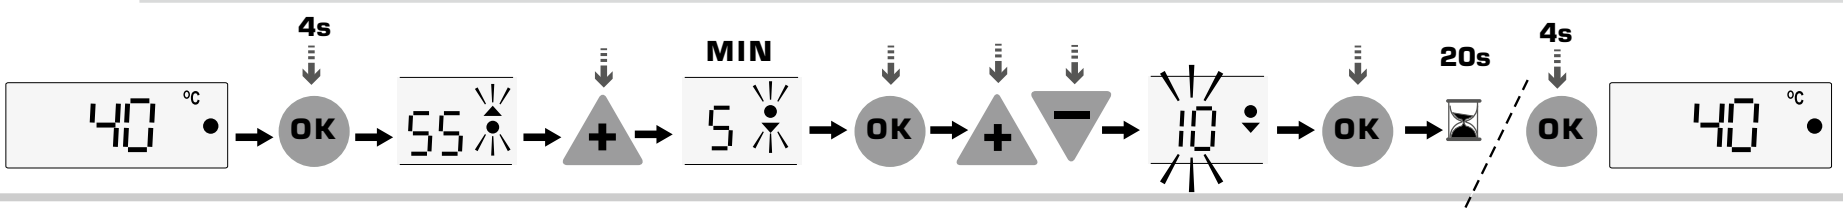



i

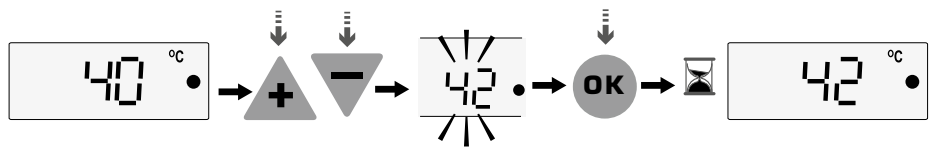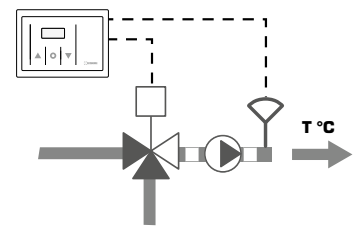

i **T2**

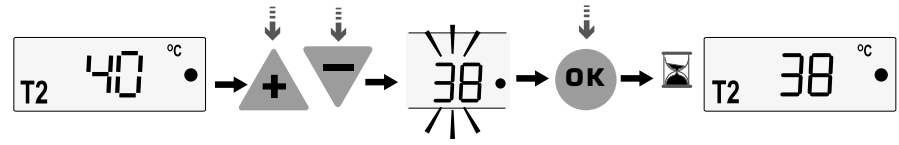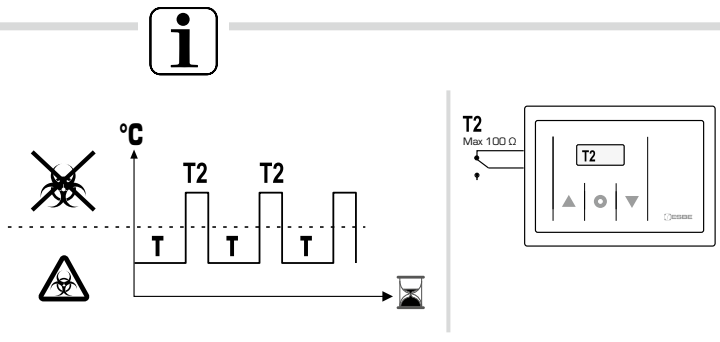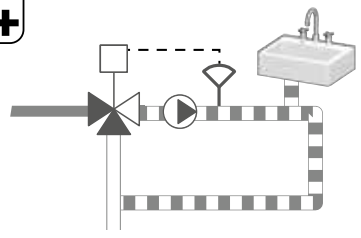

T

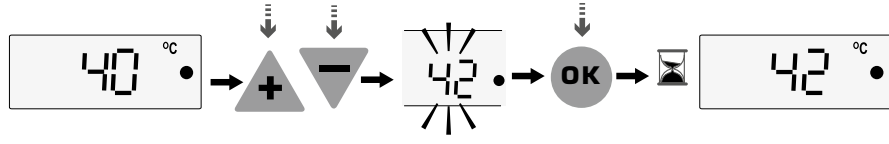



i






1




2

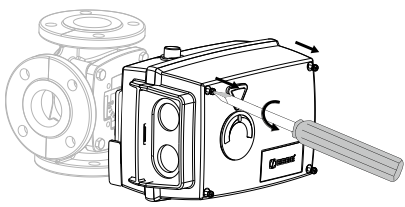

3

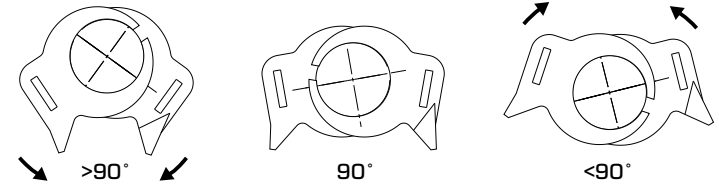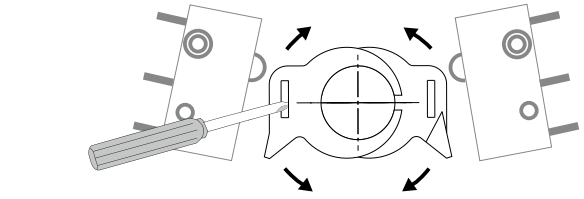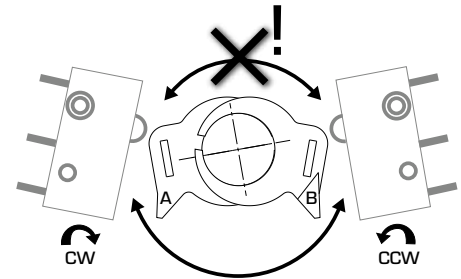

4



5

